

Digital 2-color IMPAC pyrometer with fiber optic for non-contact temperature measurement on metals, ceramics, graphite etc. between 300 and 3300 °C

ISR 12-LO • IGAR 12-LO



- Extremely fast exposure time
- Very small spot sizes
- Highest accuracy
- Built-in lens contamination control system
- 2-color- / mono- / metal mode (switchable)
- Built-in laser targeting light
- All parameters adjustable at the instrument
- Output 0 - 20 mA or 4 - 20 mA (switchable)
- Interface RS232 / RS485 (switchable)
- Test current output for diagnostics



The pyrometers ISR 12-LO and IGAR 12-LO are digital, highly accurate 2-color pyrometers with fiber optic for non-contact temperature measurement.

The pyrometers measures in the 2-color principle in which two adjacent wavelength are used to calculate the temperature. This technique offers the following advantages compared with the standard one-color pyrometers:

- The temperature measurement is independent of the emissivity of the object in wide ranges
- The measuring object can be smaller than the spot size
- Measurements are unaffected by dust and other contaminants in the field of view or by dirty viewing windows

Additionally, the pyrometers can be switched to 1-color mode and used like a conventional pyrometer. The metal mode allows measurements of metals and alloys with unknown K-factor (emissivity slope).

Optical head and fiber can be used in very high ambient temperatures up to 250 °C without cooling and they are unaffected by electromagnetic interferences.


The very short response time of only 2 ms facilitates the measurement of fastest heating processes.

You can setup the pyrometer as well as view and store the temperature on a PC using serial interface and the provided software InfraWin.

Typical Applications

- Induction heating
- Welding
- Casting
- Forging
- Annealing
- Sintering
- Rolling Mill
- Rotary Kilns
- Pouring Stream
- Research and Development
- Laser Applications

Technical Data

Measurement Specifications		Communication / Interface	
Temperature Ranges:	ISR 12-LO 600...1300 °C (MB 13) 750...1800 °C (MB 18) 900...2500 °C (MB 25) 1000...3300 °C (MB 33)	IGAR 12-LO 300...1000 °C (MB 10) 350...1300 °C (MB 13) 450...1700 °C (MB 17) 500...2200 °C (MB 22) 550...2500 °C (MB 25)	Analog Output: 0 to 20 or 4 to 20 mA switchable, load 0 to 500 Ohm Test current 10 mA for inspection of wiring and connected instruments
Sub Range:	Any range adjustable within the temperature range, min. span 51 °C		Interfaces: Switchable: RS232 or RS485 addressable, half duplex; baud rate 2.4 up to 115.2 kBd
Spectral Ranges:	ISR 12-LO Channel 1: 0.8 µm Channel 2: 1.05 µm	IGAR 12-LO Channel 1: 1.52 µm Channel 2: 1.64 µm	Display: Built-in 4-digit 7-segment-LED, height 13 mm; LED for °C / °F, clear mode "auto", "ext", ratio- (2-color-) / mono- / metal mode
Resolution:	Display: 1 °C Analog output: < 0.025% of adjusted temperature range	Interface: 0.1 °C	Control Panel: 4 keys, switch for interface, key for test current
Accuracy: (K= 1, t ₉₀ = 1 s, T _{amb.} = 23 °C)	ISR 12-LO 0.4% of reading in °C + 1 °C (< 1500 °C) 0.6% of reading in °C + 1 °C (> 1500 °C)	IGAR 12-LO 0.5% of reading in °C + 1 °C (< 1500 °C) 0.7% of reading in °C + 1 °C (> 1500 °C)	Parameters: Adjustable at the instrument or via serial interface: Emissivity ε, Emissivity slope K, response time t ₉₀ , clear times t _{clear} for maximum value storage, automatic or external deletion of the maximum value storage, setting of ratio- / mono- / metal mode, switch-off limit, analog output 0 to 20 or 4 to 20 mA, Temperature sub range, address, baud rate, Temperature display in °C / °F
Repeatability: (K= 1, t ₉₀ = 1 s, T _{amb.} = 23 °C)	ISR 12-LO: 0.2% of reading in °C + 1 °C IGAR 12-LO: 0.3% of reading in °C + 1 °C		Electrical
Signal Processing:	Photo current, digitized immediately		Power Supply: 24 V DC (15 to 40 V DC) or 24 V AC (12 to 30 V AC), 48 to 62 Hz
Emissivity Slope K:	ε ₁ /ε ₂ : 0.800 to 1.200 adjustable in steps of 0.001		Current Consumption: Max. 600 mA
Emissivity ε:	0.1 to 1 adjustable in steps of 0.001		Isolation: Power supply, analog output and digital interface are galvanically isolated against each other
Measuring Modes:	Adjustable: ratio- (2-color-) / mono- / metal mode, switchable		Switch Contact: Max. 0.15 A
Switch-off Limit:	2% - 50% in 1% steps		Environmental
Exposure Time t ₉₀ :	2 ms (with dynamical adaption at low signal levels), adjustable up to 10 s		Operating Temperature: At the converter housing: 0 to 60 °C (ISR 12-LO); 0 to 50 °C (IGAR 12-LO)
Maximum Value Storage:	Built-in single or double storage. Cleared by preselected time interval t _{clear} (off; 0.01 s; 0.05 s; 0.25 s; 1 s; 5 s; 25 s) or extern or automatically with the next measuring object		Storage Temperature: -20 to 70 °C
Sighting System:	Laser targeting (max. power level < 1 mW, λ = 630-680 nm, CDRH class II)		Relative Humidity: Non condensing conditions
			Weight: Converter: 2.2 kg; optical head II: 140 g; fiber (2.5 m): 250 g
			Protection System: IP65 (according to DIN 40 050)
			CE-label: According to EU directives about electromagnetic immunity

Note: The calibration / adjustment of this pyrometer is carried out in accordance with VDI/VDE 3511, Part 4.4. See <http://info.lumasenseinc.com/> calibration for more information.

Fiber Optic

The radiation, coming in through the optical head, is transported via the lens system into the mono glass fiber with flexible stainless steel protection tube where it is transmitted along to the converter. As the optical head contains only the lens system and the sensor and the electronics are located in the converter box, fiber and optical head can withstand ambient temperatures up to 250 °C without cooling. Depending on the measuring range 2 different fibers are used. They are marked red or blue.

Length:	2.5 m, 5 m, 7.5 m, 10 m, 15 m, 30 m on request
Color mark at the fiber:	Blue: ISR 12-LO, MB 13; IGAR 12-LO, MB 10 Red: ISR 12-LO, MB 18, 25, 33, IGAR 12-LO MB 13, 17, 22, 25
Max ambient temperature:	Max 250 °C (instrument's side with color mark max 125 °C)
Minimum bending radius:	Blue: 100 mm for short time, 300 mm permanently Red: 50 mm for short time, 120 mm permanently

Optical Head

Depending on the application the instrument will be delivered with a small or a large optical head. The selection of the optical head depends not only on its size but also on the required spot size (size of the measuring object) and the measuring distance.

Optical head I:


With the very small dimensions the optical head I is suited for use in confined spaces. The optics is adjusted to one of the measuring distances mentioned in the table. The mentioned spot size will be achieved in exactly this distance (other distances on request).




Optical head II:

The optics II is bigger, but smaller spot sizes can be achieved. Two designs are available, fixed adjusted or focusable:

Similar to optics I the fixed adjusted type is adjusted to one of the measuring distances mentioned in the table (other distances on request).

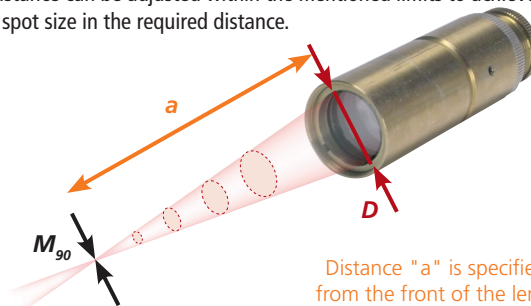
The focusable type is available for 6 different distance ranges. Each measuring distance can be adjusted within the mentioned limits to achieve the smallest spot size in the required distance.




Optical Head	Measuring distance a [mm]	Spot size M_{90} [mm]		Aperture D [mm]
		ISR 12-LO: MB 13 IGAR 12-LO: MB 10	ISR 12-LO: MB 18, 25, 33 IGAR 12-LO: MB 13, 17, 22, 25	
Optical head I: 	Adjusted to: 120	2.2	1.2	7
	Adjusted to: 260	5	2.6	7
	Adjusted to: 700	14	7.2	7
Optical head II: (fixed adjusted) 	Adjusted to: 87	0.75	0.45	17
	Adjusted to: 200	1.5	0.8	17
	Adjusted to: 600	5.3	2.7	15
	Adjusted to: 4500	42	22	15
Optical head II: (focusable) 	Range: 88 ... 110	0.8 ... 1.1	0.45 ... 0.6	17
	Range: 95 ... 129	0.9 ... 1.3	0.5 ... 0.75	16
	Range: 105 ... 161	1.1 ... 1.7	0.6 ... 1	15
	Range: 200 ... 346	1.5 ... 2.8	0.8 ... 1.5	17
	Range: 247 ... 606	2.0 ... 5.2	1.1 ... 2.7	16
	Range: 340 ... 4500	2.8 ... 42	1.5 ... 22	15

Dimensions


Converter:

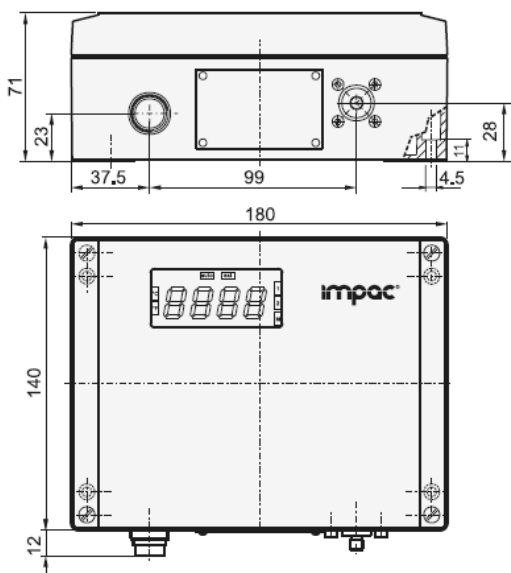


Optical head type I:



Optical head type II: (fixed adjusted)



Optical head type II: (focusable)



All dimensions in mm

Reference Numbers

Ordering note: The pyrometers ISR 12-LO and IGAR 12-LO can be configured with different optical fiber lengths and optical heads as well as with various optional extras. To determine the part number and the price for the desired combination please contact LumaSense or your LumaSense sales representative.

Scope of delivery: Converter, optical fiber and optical head as per configuration, works certificate, PC software InfraWin, and user manual.

A connection cable is not included in the scope of delivery and needs to be ordered separately.

Accessories

3 820 330	Connection cable, straight connector, 5 m	3 890 560	LED digital display DA 6000-N: with possibility for pyrometer parameter settings for digital IMPAC pyrometers; RS232 interface
3 820 500	Connection cable, straight connector, 10 m	3 890 570	DA 6000-N with RS485 interface
3 820 510	Connection cable, straight connector, 15 m	3 890 520	DA 6000, digital display, digital and analog input, dual limit switch, maximum value storage, analogue output, RS232
3 820 810	Connection cable, straight connector, 20 m	3 890 530	DA 6000, digital display, digital and analog input, dual limit switch, maximum value storage, analogue output, RS485
3 820 820	Connection cable, straight connector, 25 m	3 890 150	DA 6000-T, digital display, for measurement of the cool down time $t_{8,5}$ from 800 °C to 500 °C (for welding processes)
3 820 520	Connection cable, straight connector, 30 m	3 826 510	PI 6000, programmable PID-controller
3 820 740	Connection cable, length 5 m, straight connector, temperature resistant up to 200 °C	3 838 280	Laser protection filter for fiber vario-optics (built in), 920...1100 nm, for IGAR 12-LO
3 852 290	Power supply, NG DC, 100 to 240 V AC, 24 V DC, 1 A	3 834 390	Ball and socket mounting for optical head I or II
3 852 550	Power supply NG 2D for DIN rail mounting; 85 to 265 V AC \Rightarrow 24 V DC, 600 mA with 2 settable limit switches	3 834 230	Adjustable mounting support for optical head II
3 852 440	Protocol transducer RS485/RS232 (switch.) <-> Profbus-DP for 1 device	3 835 170	Air purge unit, stainless steel, for optical head I
3 852 460	Protocol transducer RS485 <-> Profbus DP for 32 devices	3 835 180	Air purge unit, stainless steel, for optical head II
3 852 620	Protocol converter UPP RS485 or RS232 <-> ProfNet, for 1 pyrometer	3 835 240	Air purge unit with 90° mirror for optical head II
3 852 630	Protocol converter UPP RS485 <-> ProfNet, for max. 32 pyrometers		
3 891 220	DA 4000: LED display, 2 wire power supply, with 2 limit contacts, 115 V AC		
3 890 650	DA 4000: LED display, 2 wire power supply, with 2 limit contacts, 230 V AC		

Features



LumaSense Technologies

Temperature and Gas Sensing Solutions

Americas, Australia, Asia
Sales & Service
Santa Clara, CA
Ph: +1 800 631 0176
Fax: +1 408 727 1677

Europe, Middle East, Africa
Sales & Service
Frankfurt, Germany
Ph: +49 69 97373 0
Fax: +49 69 97373 167

India
Sales & Support Center
Mumbai, India
Ph: +91 22 67419203
Fax: +91 22 67419201

China
Sales & Support Center
Shanghai, China
Ph: +86 133 1182 7766
Ph: +86 21 5877 2383

info@lumasenseinc.com

LumaSense Technologies, Inc., reserves the right to change the information in this publication at any time.

www.lumasenseinc.com

©2018 LumaSense Technologies. All rights reserved.
ISR-IGAR 12-LO - EN - Rev. 08/29/2018