

SPECIFICATION FOR HID CAPACITORS

DRAWN BY	CHECKED BY	APPROVED BY
周香康	吴宏刚	王瑜洁

NINGBO SHINE ELECTRICAL.CO.,LTD
2025-8-21




1、 Technical Specification

- 1.1. Rated Capacitance : see table
- 1.2. Capacitance tolerance : $\pm 6\%$
- 1.3. Rated voltage : see table
- 1.4. Rated frequency : 50/60Hz
- 1.5. Rated temperature : $+ 70^{\circ}\text{C}$
- 1.6. Minimum temperature: -40°C
- 1.7. Dissipation factor: $\tan\delta \leq 0.002$ (at 50/60 Hz, Rated voltage)
- 1.8. Withstand Voltage: : T-T 2.0Un 2s
T-C 3000 VAC 2s
- 1.9. Authentication: CUL
- 1.10. With ROHS standards
- 1.11. Using explosion protection
- 1.12. Outer terminal:: AMP250(4+4)
- 1.13. Sealing test: The capacitor shall be mounted in a position most likely to reveal leakage at a temperature $85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 2 hours. No leakage shall occur.
- 1.14. Product shape is designed according to the capacitor


2、 Overall size

P/N	μF	VAC	Overall size	
			L*B	H
Z62S6650M01N	50	660	2" (90×48mm)	4.72" (119.9mm)

3、Outside drawing

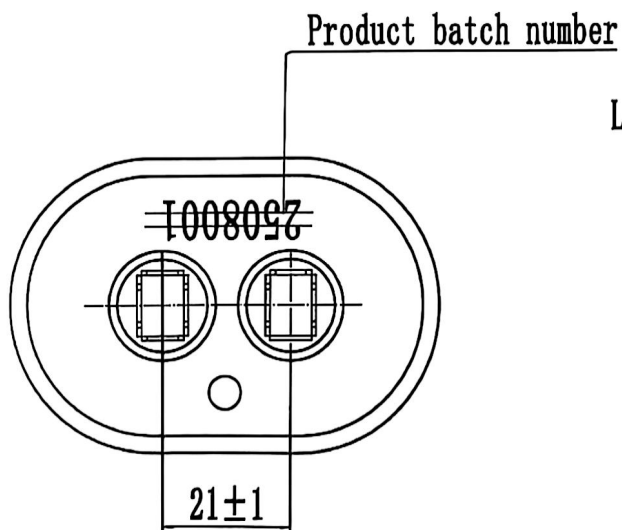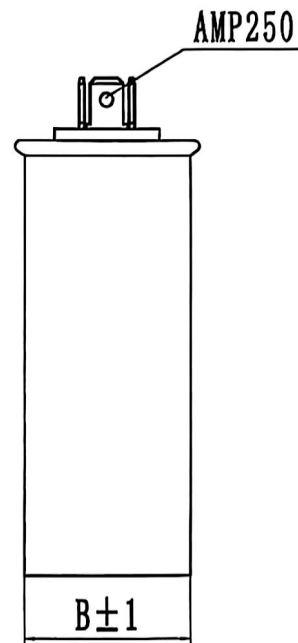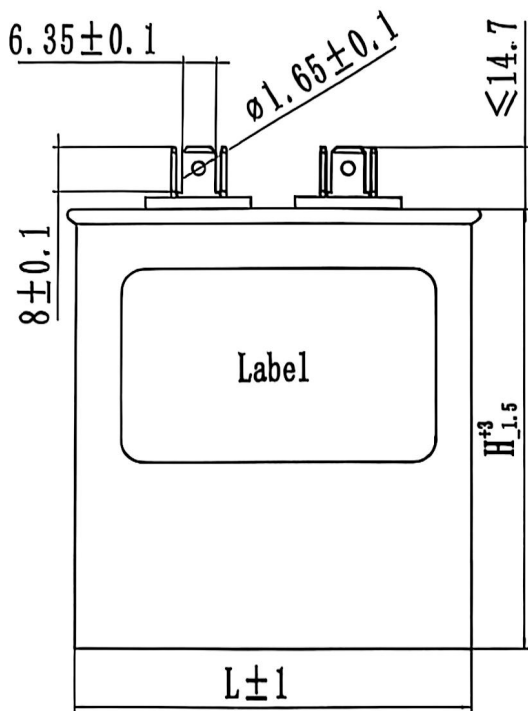

Label:

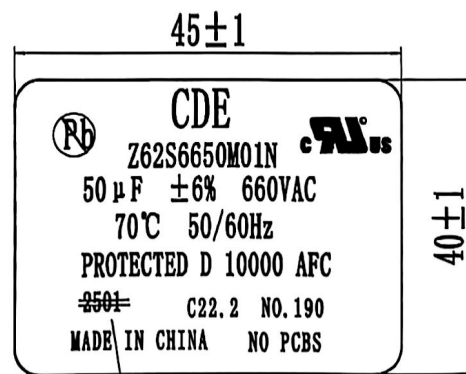

Week 1 of 2025